


Trafficline®

Loosely laid interlocking PVC floor tile



Much **more**
than a floor

Your second floor for industrial spaces and public places



- Supple, strong and non-slip tiles
- Ergonomic and ecological floor (100 % recyclable)
- Esthetic and customisable floor
- Thermal and sound insulation
- Easy installation on existing floors
- Quick assembling and disassembling, without noise nor dust, and without interruption of the activity

*No gluing, except exposure to the sun or to special conditions, no major noises, no interruption of work in the concerned premises.
Ask our technical department.*



Trafficline®

Complete tiles adapted to heavy circulation with an exclusive jig-saw attachment system

■ **5 finishes, 14 standard colours**

■ **Long-term Stainproof® protection :**


TRAFICLINE tiles are now benefiting from a new and exclusive surface treatment, a worldwide innovation for an easy maintenance

■ **Reproduction without size limit of your logo thanks to the exclusive Visiofloor® process :**

a second patented worldwide innovation to customise your floors

The combination of TRAFICLINE and STANDLINE offers a complete technical and esthetic flooring solution.

The levelling between TRAFICLINE and STANDLINE is obtained by means of an access ramp.




Standline®

Duckboard tiles adapted to heavy circulation allowing liquids, metal cuttings... flow

■ For **high use floors** and heavy plant traffic crossing, stopping dirt spreading into the building

■ For perimeter areas around machines that eject oil, metal cutting... which could be dangerous for the **machine operators** and affect the **cleanliness of the premises**

■ For areas where food is handled, industrial kitchens and premises that need to be cleaned by high powered jets for **sanitation**

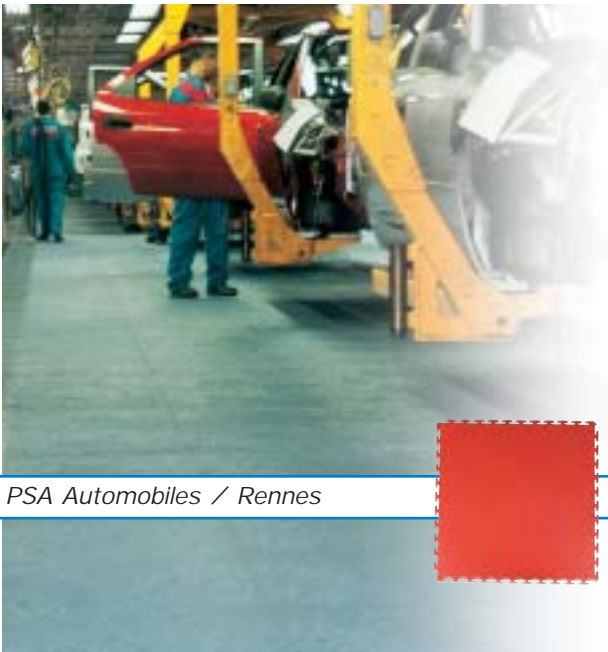

PSA Automobiles / Rennes



Trafficline STG

® Stainproof

Finish	Fine grain
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	7 mm
Weight	2,10 kg /tile 8,50 kg /sq.meter
Surface aspect	Satin
Access ramps Access corners	500x160 mm - 0,64 kg 160x160 mm - 0,19 kg



CAT L'Ambresis / Villeparisis



Trafficline STS

® Stainproof

Finish	Rice grain - Fine structure
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	7 mm
Weight	2,30 kg /tile 9,30 kg /sq.meter
Surface aspect	Brilliant satin
Access ramps Access corners	500x160 mm - 0,67 kg 160x160 mm - 0,20 kg



Centre SCANIA / Angers



Trafficline STA

® Stainproof

Finish	Rice grain - Big structure
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	7 mm
Weight	2,30 kg /tile 9,10 kg /sq.meter
Surface aspect	Brilliant satin
Access ramps Access corners	500x160 mm - 0,70 kg 160x160 mm - 0,20 kg

Traficline STR[®] Stainproof



MIDAS / Antibes

Finish	Square studs with bevelled edges
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	7 mm
Weight	2,30 kg /tile 9,00 kg /sq.meter
Surface aspect	Brilliant satin
Access ramps Access corners	500x160 mm - 0,67 kg 160x160 mm - 0,20 kg



MATRA Aérospatiale / Nantes

Standline[®] Drainage duckboard

Finish	Fine grain
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	14 mm
Weight	2,00 kg /tile 8,20 kg /sq.meter
Surface aspect	Satin
Access ramps Access corners	500x160 mm - 0,65 kg 130x160 mm - 0,13 kg

Traficline and Standline ACCESSORIES

Fittings available to compensate any differences in level due to certain laying configurations, to facilitate access to new flooring or mark out specific areas.

■ Access ramp

Dimensions : 500 mm x 160 mm – **Thickness :** 7 mm (Traficline) or 14 mm (Standline)
Colours : Traficline and Standline colours as well as a two-colour "Zebra" safety pattern

■ Access corner

Dimensions : 160 mm x 160 mm – **Thickness :** 7 mm (Traficline) or 14 mm (Standline) – **Colours :** Traficline and Standline colours

■ Marking line / speed breaker

Dimensions : 500 mm x 85 mm – **Thickness :** 7 mm (Traficline)
Double chamfered border – **Colours :** yellow or "zebra" - To be adhesive bonded, stapled or nailed on pre-existing flooring or on any uniform and resistant floor (concrete, resin, etc...)



"Zebra" finish marking line




"Zebra" finish access ramp

AVAILABLE COLOURS for Traficline and Standline


 **Steel grey**
STG - STR - STS - STA


 **Azur blue (RAL 5009)**
STG - STR - STS

 **Blue of France**
STG - STS

 **Anthracite grey (RAL 7016)**
STG - STR - STS - STA - Standline

 **Green (RAL 6028)**
STG - STR - STS - STA - Standline

 **Yellow security (RAL 1003)**
STG - STR - STS - STA - Standline

 **Black**
STG - STR - STS - STA

 **Red (RAL 3020)**
STG - STS

 **Ivory (RAL 1015)**
STG - STR - STS

Other RAL colours :
minimum 500 sq.meter

Optiline® Stainproof

Separate floor system both attractive and hardwearing, for **COMMUNITY SERVICE BUILDINGS** and foot traffic

- For interior surfaces (new or covering old floors) of **community premises** having a middle to strong traffic : public building, schools, kindergardens, crèches, senior citizens buildings, boutiques, shops, offices conference rooms, entrance halls, corridors, waiting rooms, archives room, exhibition areas, trade fair stands, storerooms, cellars, utility rooms...
- **Easy cleaning** and silent traffic thanks to their finish (microdisc)




Supple, esthetic and strong tiles

Finish	Very fine grain
Dimensions	500 x 500 mm 4 tiles/sq.meter
Thickness	5 mm
Weight	1,65 kg /tile 6,60 kg /sq.meter
Surface aspect	Satin
Access ramps	500x160 mm - 0,54 kg
Access corners	160x160 mm - 0,15 kg

- **Red** (RAL 3022)
- **Yellow** (RAL 1034)
- **Grey** (INT 7000)
- **Blue** (RAL 5024)
- **Green** (RAL 6027)

Periline® Perimeter finishing accessories




- **Perimeter base board finishing designed for Traficline® and Optiline® PVC tiles** composed of two parts that fit together : a rigid base support to be attached to the floor and a two-component (flexible and rigid) covering element
- **Allows for the fluctuations in dimensions** inherent to thermoplastic coverings (elongation / shrinkage) and masks any slight deviations in the cutting line around the perimeter of the area
- Makes subsequent maintenance easier as it avoids gradual built-up of organic and mineral deposits, improves the **impervious qualities of tiles** and gives a pleasant and well designed finish

• Unity : 3 lm • Orders by multiple of 5 unities • Delivered with 50 impact screws by 15 linear meters

- **Grey** (RAL 7016)
- **Yellow** (RAL 1003)
- **White**
- **Lavander**
- **Orange** (RAL 2004)

Installation

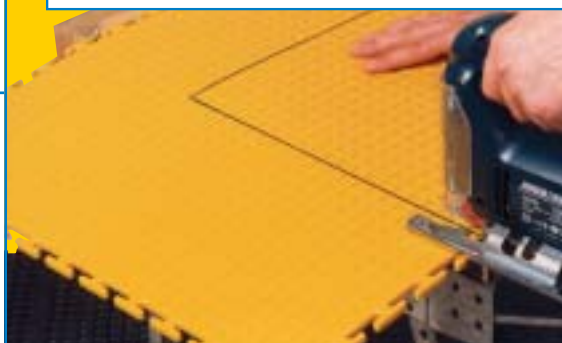

- The floor must be firm and flat so the tiles are not deformed when laid (contact our technicians if necessary)
- A chalk-line is drawn along one of the walls, taking into consideration the dimensions of any access ramps due to an opening and the tiles are laid from that line
- A gap of 0.5 cm should be left around the edges of rooms or any other obstacles
- The tiles can be easily cut to the required measurements with a circular saw or with a jigsaw for more difficult cuts

A floor that is tested and approved by recognized authorities

CONFORMITY TO CE STANDARD



Traficline® corresponds to the CE marking criteria expected for PVC floor coverings (pr EN 14041)

A 100% RECYCLABLE PRODUCT



Contact our environmental department for details on conditions of taking back old Traficline® tiles

OPTIONS ON REQUEST

■ Antistatic tiles

Test report from LCIE (Central Laboratory for Electrical Industries), according to NFP 62-001 standard on request

■ Tiles for application in coolers and freezers

Flexible and wear resistant down to -20°C



CSTB performance classification

Technical characteristics	Standard	Units of measurement	Traficline®	Standline®
Hardness	ISO 868	Shore A	91,7	91,9
Abrasion	NF EN 660-1	mm	0,10 ie 1,5 % of the thickness	0,10 ie 0,7% of the thickness
Resistance to compression	NF P 15 451 CSTB	kg/cm2	516	344
Toughness (resistance to pull) - for 1% elongation - for 2% elongation	MI UEAtc	Kg/m	836 1378,5	287,1 470,9
Elongation before rupture	NF T 46 002	%	126,8	110,6
Force to rupture	NF T 46 002	ton/m2	1376	1172
Dimensional stability	NF EN 404	%	0,34	0,35
Bending to heat - initial - final	NF EN 434	mm	0,2 0,8	0,2 0,9
Standard indentation - under load - remanent	NF EN 433	mm	0,10 0,01	1,48 0,08
Intense indentation - under load - remanent	NF EN 433	mm	0,17 0,07	2,08 0,24
Resistance to natural light through a window	NF EN 20105-B02	Scale 1 to 5 where 5 is the most resistant	5 (no damage)	5 (no damage)
Flow testing (output 1 800 l/h) - no incline - incline of 1 %	CSTB	Saturation time in seconds		40 85
Chemical resistance - Common acids - common bases - oils - gas-oil - Solvents	CSTB 2954		No deterioration Not resistant to prolonged contact	No deterioration Not resistant to prolonged contact
U.V. stability			Good*	Good*
Inflammability	EN 13501-1		Cfl-s2 Hardly inflammable	Hardly inflammable
Slipping test Coefficient of dynamic friction	EN 13893		0,75	

* CSTB test report on request

PVC floors maintenance



■ Recommendations for the maintenance of your PVC flooring :

- automatic washing machine with rotary PVC brush and suction line
- our Cleanline detergent with variable dilution (3 to 5 %) depending on the state of the floor

■ Recommendations for the more resistant stains (tyre marks, oil, grease...) :

our Superclean stain remover



Trafficline

® Visiofloor

PATENTED PRINTING PROCESS

Let your floor communicate



PRINTING

Digital printing using U.V. inks and U.V. drying



PROTECTION

Extra durable abrasion, IR/U.V. resistant process



YOUR FLOOR CUSTOMISED



Customised digital printing using inks fixed by U.V. drying

An exceptional and unique form of communication


Patented


No quantity limit

Exclusive stain resistant protection system

Exact reproduction of any type of logo, pattern, photo... without size limit (quote on request)

An exclusive process
A worldwide innovation

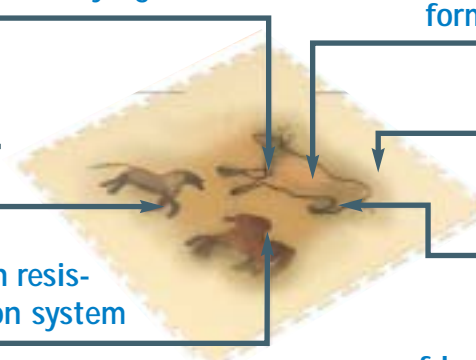

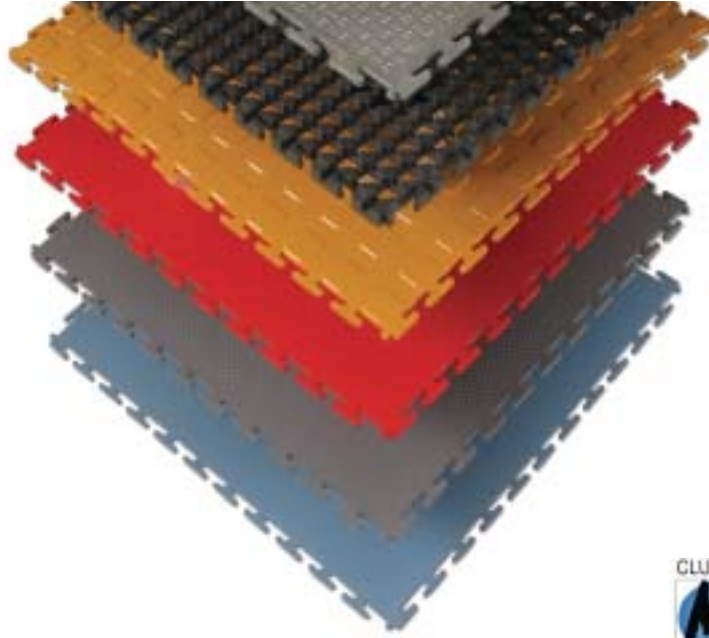

Industrial floors references

AÉROSPATIALE MATRA ■ AFER ■ AIA ■ AIXAM ■ ALSTOM ■ ALUMINIUM PÉCHINEY
■ ARENA INTERNATIONAL ■ ATLANTIC INDUSTRIE ■ AUCHAN ■ AUDAX ■ AVON
■ BASES INTERMARCHÉ ■ BEGHIN SAY ■ BERTRAND FAURE ■ BILLION ■ BOSCH ■
BSN ■ CARMETAL / AIXAM ■ CHOQUENET ■ CHU GRENOBLE ET CHERBOURG ■
CITÉ DES CONGRÈS DE NANTES ■ CLERGERIE ■ CONFISERIE THERMALE VICHY ■
CONTINENTAL PNEUS ■ CORRÈZE CONSERVES ■ CRISTALLERIE DE BACCARAT ■
DGA ■ DUNLOP FRANCE ■ ÉCOLE NORMALE ■ ENSAE ■ FAURECIA ■ FRANCE
TELECOM ■ FRANCEVAL ■ FROMAGERIE BEL ■ FROMAGERIE D'ORVAL ■ GDF ■
GIAT ■ GUY DEGRENNE ■ HEUDEBERT ■ HEULIEZ ■ HOUEL ■ IER ■ IFRTP ■ IGN
■ IMPRIMERIE NATIONALE ■ INSTITUT GÉOGRAPHIQUE ■ INTERMARCHÉ ■ ISTR
■ JALATTE ■ KRONENBOURG ■ LABORATOIRE DE L'ACCÉLÉRATEUR LINÉAIRE ■
LAFON ■ LAITERIE VAL D'ANCENIS ■ LANCASTER MONACO ■ LEGRAND ■ LEROY
SOMER ■ LINDAL FRANCE ■ MAIRIE DE PARIS ■ MBK ■ MERLIN GERIN ■
MESSIER BUGATTI ■ MIDAS ■ MINISTÈRE DE LA DÉFENSE ■ OBI ■ OTIS ■ PAMPYRL
■ PARC EXPOSITIONS BORDEAUX ■ PEUGEOT CITROEN AUTOMOBILES ■ PICARD
SURGELÉS ■ RATP ■ RENAULT ■ RENAULT AGRICULTURE ■ RHÔNE POULENC ■
RIVOIRE ET CARRET LUSTUCRU ■ SAFT ■ SAGEM ■ SANOFI BEAUTÉ ■ SAPRR ■
SCANIA ■ SEITA ■ SERVIR ■ SMURFIT ■ SNCF ■ SOLVAY ■ SOMMER ALLIBERT ■
STADE DE MONACO ■ SYNTHELABO ■ TOYOTA ■ VALEO ■ VALLOUREC ■
VENDÉE PLASTIQUE ■ VUITTON ■ WESTAFLEX ■ WESTFALIA ■ WIRQUIN PLASTIQUES.

Consult our site

www.groupe-tlm.com



Tél. : 33 (0)4 70 51 52 97

Fax : 33 (0)4 70 51 57 21

Mail : contact@groupe-tlm.com

Route de Montluçon – 03410 Prémilhat – France